

SPECIFICATIONS • AGM, Maintenance-Free Battery

12-VOLT ▼

| BATTERY TYPE | | CCA 0°F -18°C | CAPACITY AH (10HR) | MAXIMUM DIMENSIONS | | | | | | ASSEMBLY FIGURE | WEIGHT (KG) | | WEIGHT (LBS) | | ACID VOLUME (Liter) | TERMINAL (P.30) |
|---------------------------|-------------------------|---------------------|--------------------------|------------------------|----|-----|----------------------|---------|--------|--------------------|--------------|-----------------|--------------|-----------------|---------------------------|--------------------|
| | | | | MILLIMETERS (±2 mm) | | | INCHES (±1/16 in) | | | | WITH ACID | WITHOUT ACID | WITH ACID | WITHOUT ACID | | |
| | | | | L | W | H | L | W | H | | FA | BS | FA | BS | | |
| CTZ4V ¹ | N/A | 64 | 3 | 113 | 70 | 88 | 4 7/16 | 2 3/4 | 3 7/16 | | 1.60 | N/A | 3.52 | N/A | N/A | D |
| CTZ5S | N/A | 65 | 3.5 | 113 | 70 | 88 | 4 7/16 | 2 3/4 | 3 7/16 | | 1.60 | N/A | 3.52 | N/A | N/A | D |
| CTZ6L (FA) | CTZ6L-BS ¹ | 100 | 5 | 113 | 70 | 105 | 4 7/16 | 2 3/4 | 4 1/8 | | 2.07 | 1.75 | 4.56 | 3.85 | 0.24 | D |
| CTZ7S | CTZ7S-BS | 130 | 6 | 113 | 70 | 107 | 4 7/16 | 2 3/4 | 4 3/16 | | 2.02 | 1.70 | 4.45 | 3.74 | 0.24 | D |
| CTZ8V ¹ | N/A | 120 | 7 | 113 | 70 | 130 | 4 7/16 | 2 3/4 | 5 1/8 | | 2.49 | N/A | 5.48 | N/A | N/A | D |
| CTZ10S | CTZ10S-BS | 190 | 8.6 | 151 | 87 | 92 | 5 15/16 | 3 7/16 | 3 5/8 | | 3.25 | 2.70 | 7.16 | 5.95 | 0.42 | D |
| CTZ12S | CTZ12S-BS | 210 | 11 | 151 | 87 | 110 | 5 15/16 | 3 7/16 | 4 5/16 | | 3.71 | 3.00 | 8.17 | 6.61 | 0.54 | D |
| CTZ14S | CTZ14S-BS | 220 | 11.2 | 151 | 87 | 110 | 5 15/16 | 3 7/16 | 4 5/16 | | 3.81 | 3.10 | 8.39 | 6.83 | 0.54 | D |
| CT2.5L | N/A | 30 | 2.5 | 79 | 69 | 105 | 3 1/8 | 2 11/16 | 4 1/8 | | 1.21 | N/A | 2.67 | N/A | N/A | — |
| CT4B-5 | N/A | 40 | 2.5 | 113 | 38 | 86 | 4 7/16 | 1 1/2 | 3 3/8 | | 1.05 | N/A | 2.31 | N/A | N/A | N |
| CT7B-4 | CT7B-BS | 110 | 6.5 | 151 | 66 | 92 | 5 15/16 | 2 9/16 | 3 5/8 | | 2.45 | 2.04 | 5.40 | 4.49 | 0.31 | J / D |
| CT9B-4 | CT9B-BS | 120 | 8 | 151 | 69 | 105 | 5 15/16 | 2 11/16 | 4 1/8 | | 3.05 | 2.50 | 6.72 | 5.51 | 0.42 | J / D |
| CT12B-4 | CT12B-BS | 170 | 10 | 151 | 69 | 130 | 5 15/16 | 2 11/16 | 5 1/8 | | 3.90 | 3.19 | 8.59 | 7.03 | 0.54 | J / D |
| CT14B-4 | CT14B-BS | 200 | 12 | 151 | 69 | 144 | 5 15/16 | 2 11/16 | 5 5/8 | | 4.35 | 3.56 | 9.58 | 7.84 | 0.60 | J / D |
| N/A | CTR4A-BS | 40 | 2.3 | 113 | 48 | 85 | 4 7/16 | 1 7/8 | 3 3/8 | | N/A | 0.95 | N/A | 2.09 | 0.14 | O |
| CT4L (FA) | CT4L-BS | 40 | 3 | 113 | 70 | 87 | 4 7/16 | 2 3/4 | 3 7/16 | | 1.45 | 1.22 | 3.20 | 2.69 | 0.19 | D |
| CTX4L (FA) | CTX4L-BS | 60 | 3 | 113 | 70 | 87 | 4 7/16 | 2 3/4 | 3 7/16 | | 1.50 | 1.25 | 3.30 | 2.75 | 0.19 | D |
| CT5L (FA) | CT5L-BS | 60 | 4 | 113 | 70 | 105 | 4 7/16 | 2 3/4 | 4 1/8 | | 1.91 | 1.60 | 4.21 | 3.52 | 0.24 | D |
| CTX5L (FA) | CTX5L-BS | 80 | 4 | 113 | 70 | 105 | 4 7/16 | 2 3/4 | 4 1/8 | | 1.97 | 1.65 | 4.34 | 3.63 | 0.24 | D |
| CTX7L (FA) | CTX7L-BS | 100 | 6 | 113 | 70 | 130 | 4 7/16 | 2 3/4 | 5 1/8 | | 2.48 | 2.00 | 5.46 | 4.41 | 0.34 | D |
| CTX7A (FA) | CTX7A-BS | 105 | 6 | 150 | 87 | 93 | 5 7/8 | 3 7/16 | 3 3/4 | | 2.72 | 2.26 | 5.99 | 4.98 | 0.35 | D |
| CTX9 (FA) | CTX9-BS | 130 | 8 | 151 | 87 | 106 | 5 15/16 | 3 7/16 | 4 3/16 | | 3.08 | 2.52 | 6.78 | 5.55 | 0.42 | D |
| CTX12 (FA) | CTX12-BS | 175 | 10 | 150 | 87 | 130 | 5 7/8 | 3 7/16 | 5 1/8 | | 4.12 | 3.30 | 9.07 | 7.27 | 0.60 | D |
| CT12A-BS | CTX12A-BS | 170 | 10 | 151 | 87 | 106 | 5 15/16 | 3 7/16 | 4 3/16 | | 3.60 | 3.00 | 7.93 | 6.61 | 0.50 | J / D |
| CTX14 (FA) | CTX14-BS | 200 | 12 | 150 | 87 | 146 | 5 7/8 | 3 7/16 | 5 3/4 | | 4.60 | 3.70 | 10.13 | 8.15 | 0.66 | D |
| CTX14H (FA) | CTX14H-BS ¹ | 240 | 14 | 150 | 87 | 146 | 5 7/8 | 3 7/16 | 5 3/4 | | 5.10 | 4.20 | 11.23 | 9.25 | 0.66 | D |
| CTX14L (FA) | CTX14L-BS | 200 | 12 | 150 | 87 | 146 | 5 7/8 | 3 7/16 | 5 3/4 | | 4.60 | 3.70 | 10.13 | 8.15 | 0.66 | D |
| CTX14AH (FA) ² | CTX14AH-BS ² | 210 | 12 | 134 | 89 | 166 | 5 1/4 | 3 1/2 | 6 1/2 | | 4.32 | 3.42 | 9.52 | 7.53 | 0.68 | D |
| CTX14AHL (FA) | CTX14AHL-BS | 210 | 12 | 134 | 89 | 166 | 5 1/4 | 3 1/2 | 6 1/2 | | 4.32 | 3.42 | 9.52 | 7.53 | 0.68 | D |
| CTX15L (FA) | CTX15L-BS | 230 | 13 | 175 | 87 | 130 | 6 7/8 | 3 7/16 | 5 1/8 | | 5.06 | 4.20 | 11.14 | 9.25 | 0.66 | D |
| CTH16 (FA) | CTH16-12 | 230 | 14 | 150 | 88 | 161 | 5 7/8 | 3 7/16 | 6 5/16 | | 5.30 | 4.22 | 11.67 | 9.30 | 0.80 | A |
| CTX16 (FA) | CTX16-BS | 230 | 14 | 150 | 88 | 161 | 5 7/8 | 3 7/16 | 6 5/16 | | 5.30 | 4.22 | 11.67 | 9.30 | 0.80 | D |
| CTX16-1 (FA) | CTX16-BS-1 | 230 | 14 | 150 | 88 | 161 | 5 7/8 | 3 7/16 | 6 5/16 | | 5.30 | 4.22 | 11.67 | 9.30 | 0.80 | A |

¹ See Battery Cross Reference Chart On Page 27.

² Include 10mm Spacer To Increase Height For Replacing CB14A-A1 And CB14A-A2.

(Continued)

SPECIFICATIONS • AGM, Maintenance-Free Battery

12-VOLT ▼

| BATTERY TYPE | | CCA 0°F -18°C | CAPACITY AH (10HR) | MAXIMUM DIMENSIONS | | | | | | ASSEMBLY FIGURE | WEIGHT (KG) | | WEIGHT (LBS) | | ACID VOLUME (Liter) | TERMINAL (P.30) |
|------------------------------|-----------------------------|---------------------|--------------------------|------------------------|-----|-----|----------------------|---------|---------|--------------------|--------------|-----------------|--------------|-----------------|---------------------------|--------------------|
| | | | | MILLIMETERS (±2 mm) | | | INCHES (±1/16 in) | | | | WITH ACID | WITHOUT ACID | WITH ACID | WITHOUT ACID | | |
| | | | | L | W | H | L | W | H | | FA | BS | FA | BS | | |
| N/A | CTX14L-BS FT ³ | 200 | 12 | 150 | 87 | 146 | 5 7/8 | 3 7/16 | 5 3/4 | | N/A | 3.70 | N/A | 8.15 | 0.66 | T |
| CTX16CL-B (FA) ⁴ | CTX16CL-B-BS ⁴ | 270 | 19 | 178 | 102 | 175 | 7 | 4 | 6 7/8 | | 7.05 | 5.65 | 15.54 | 12.44 | 1.05 | D |
| CTX18 (FA) | CTX18-BS | 290 | 21 | 206 | 89 | 162 | 8 1/16 | 3 1/2 | 6 3/8 | | 7.20 | 5.60 | 15.86 | 12.33 | 1.20 | D |
| CTX18L (FA) | CTX18L-BS | 290 | 21 | 206 | 89 | 162 | 8 1/16 | 3 1/2 | 6 3/8 | | 7.20 | 5.60 | 15.86 | 12.33 | 1.20 | D |
| CTX19 (FA) | CTX19-BS | 260 | 19 | 175 | 101 | 157 | 6 7/8 | 3 15/16 | 6 3/16 | | 7.02 | 5.65 | 15.45 | 12.44 | 1.05 | D |
| CTX19L (FA) | CTX19L-BS | 260 | 19 | 175 | 101 | 157 | 6 7/8 | 3 15/16 | 6 3/16 | | 7.02 | 5.65 | 15.45 | 12.44 | 1.05 | D |
| CTX19L-U | N/A | 260 | 19 | 175 | 101 | 157 | 6 7/8 | 3 15/16 | 6 3/16 | | 7.20 | N/A | 15.86 | N/A | N/A | U |
| CTX20CH (FA) | CTX20CH-BS ¹ | 270 | 18 | 150 | 87 | 161 | 5 7/8 | 3 7/16 | 6 5/16 | | 5.80 | 4.69 | 12.77 | 10.33 | 0.80 | D |
| CTX20 (FA) | CTX20-BS | 270 | 18 | 175 | 87 | 154 | 6 7/8 | 3 7/16 | 6 1/16 | | 5.91 | 4.70 | 13.02 | 10.35 | 0.87 | D |
| CTX20H (FA) | CTX20H-BS ¹ | 320 | 18 | 175 | 87 | 154 | 6 7/8 | 3 7/16 | 6 1/16 | | 6.31 | 5.10 | 13.90 | 11.23 | 0.87 | D |
| CTX20H (FA) FT ³ | CTX20H-BS FT ³ | 320 | 18 | 175 | 87 | 154 | 6 7/8 | 3 7/16 | 6 1/16 | | 6.31 | 5.10 | 13.90 | 11.23 | 0.87 | T |
| CTX20L (FA) | CTX20L-BS | 270 | 18 | 175 | 87 | 154 | 6 7/8 | 3 7/16 | 6 1/16 | | 5.91 | 4.70 | 13.02 | 10.35 | 0.87 | D |
| CTX20HL (FA) | CTX20HL-BS ¹ | 320 | 18 | 175 | 87 | 154 | 6 7/8 | 3 7/16 | 6 1/16 | | 6.31 | 5.10 | 13.90 | 11.23 | 0.87 | D |
| CTX20HL (FA) FT ³ | CTX20HL-BS FT ³ | 320 | 18 | 175 | 87 | 154 | 6 7/8 | 3 7/16 | 6 1/16 | | 6.31 | 5.10 | 13.90 | 11.23 | 0.87 | T |
| CTX20HL (FA)-PW ⁷ | CTX20HL-BS-PW ⁷ | 320 | 18 | 175 | 87 | 174 | 6 7/8 | 3 7/16 | 6 13/16 | | 6.31 | 5.10 | 13.90 | 11.23 | 0.87 | D |
| CTX24HL (FA) ^{5,6} | CTX24HL-BS ^{1,5,6} | 340 | 21 | 206 | 89 | 162 | 8 1/16 | 3 1/2 | 6 3/8 | | 7.50 | 5.90 | 16.52 | 13.00 | 1.20 | D |
| CTX30L (FA) | CTX30L-BS | 400 | 30 | 166 | 127 | 175 | 6 1/2 | 5 | 6 7/8 | | 9.65 | 7.69 | 21.26 | 16.94 | 1.48 | D |
| CTX30L (FA) FT ³ | CTX30L-BS FT ³ | 400 | 30 | 166 | 127 | 175 | 6 1/2 | 5 | 6 7/8 | | 9.65 | 7.69 | 21.26 | 16.94 | 1.48 | T |
| CTX30L (FA)-PW ⁸ | CTX30L-BS-PW ⁸ | 400 | 30 | 166 | 127 | 192 | 6 1/2 | 5 | 7 9/16 | | 9.65 | 7.69 | 21.26 | 16.94 | 1.48 | D |
| U1-32 (U1-Rhino) | N/A | 300 | 32 | 196 | 130 | 179 | 7 11/16 | 5 1/8 | 7 | | 9.48 | N/A | 20.88 | N/A | N/A | M |
| U1-35R | N/A | 350 | 35(20HR) | 196 | 130 | 172 | 7 11/16 | 5 1/8 | 6 3/4 | | 12.34 | N/A | 27.18 | N/A | N/A | R |
| 51913 (FA) | N/A | 190 | 19(20HR) | 181 | 78 | 173 | 7 1/8 | 3 1/16 | 6 13/16 | | 6.06 | N/A | 13.35 | N/A | N/A | I |

CB-AGM TYPE

| | | | | | | | | | | | | | | | | |
|----------------------------|--------------------------|-----|-----|-----|----|-----|---------|--------|---------|--|------|------|------|------|------|---|
| CTX5AL (FA) ⁹ | CTX5AL-BS ⁹ | 80 | 5 | 120 | 60 | 130 | 4 11/16 | 2 3/8 | 5 1/8 | | 2.03 | 1.63 | 4.47 | 3.59 | 0.30 | E |
| N/A | CTX6.5L-BS ⁹ | 60 | 6.5 | 139 | 65 | 100 | 5 7/16 | 2 9/16 | 3 15/16 | | N/A | 1.82 | N/A | 4.01 | 0.32 | E |
| CTX9A (FA) ⁹ | CTX9A-BS ⁹ | 140 | 9 | 137 | 76 | 139 | 5 3/8 | 3 | 5 7/16 | | 3.17 | 2.60 | 6.98 | 5.73 | 0.43 | E |
| CTX12A-A (FA) ⁹ | CTX12A-A-BS ⁹ | 170 | 12 | 134 | 80 | 160 | 5 1/4 | 3 1/8 | 6 5/16 | | 4.18 | 3.30 | 9.21 | 7.27 | 0.67 | E |

12-VOLT AGM AUTOMOTIVE AUXILIARY

| | | | | | | | | | | | | | | | | |
|---------------------|-----|-----|----------|-----|----|-----|-------|--------|--------|--|------|-----|-------|-----|-----|---|
| AUX9 ¹⁰ | N/A | 130 | 9(20HR) | 150 | 87 | 106 | 5 7/8 | 3 7/16 | 4 3/16 | | 3.10 | N/A | 6.83 | N/A | N/A | D |
| AUX14 ¹⁰ | N/A | 200 | 13(20HR) | 150 | 87 | 146 | 5 7/8 | 3 7/16 | 5 3/4 | | 4.70 | N/A | 10.35 | N/A | N/A | D |

¹ See Battery Cross Reference Chart On Page 27.

² Enables Front Connection Without Using Spacers. Especially For Harley Davidson Applications.

⁴ Exact Fit Without Spacer.

⁵ Top And Front Terminal Mounts Only.

⁶ Eliminates Need For Sensor (Needs To Be Disabled).

⁷ Includes 20mm Height Spacer For Use In Replacing CB16CL-B.

⁸ Include 17mm Spacer To Increase Height For Replacing CB30CL-B.

⁹ AGM, Maintenance-Free Upgrade For The Equivalent Size Conventional Battery.

¹⁰ Auxiliary Power Support For Start-Stop Vehicles.

SPECIFICATIONS • Conventional Battery

12-VOLT ▼

| BATTERY TYPE | CAPACITY AH (10HR) | MAXIMUM DIMENSIONS | | | | | | ASSEMBLY FIGURE | VENT POSITION | WEIGHT WITHOUT ACID | | ACID VOLUME (Liter) | TERMINAL (P.30) |
|-------------------------|--------------------|---------------------|----|-----|-------------------|---------|---------|-----------------|---------------|---------------------|------|---------------------|-----------------|
| | | MILLIMETERS (±2 mm) | | | INCHES (±1/16 in) | | | | | KG | LBS | | |
| | | L | W | H | L | W | H | | | | | | |
| CB2.5L-C | 2.5 | 80 | 70 | 106 | 3 1/8 | 2 3/4 | 4 3/16 | | D | 0.77 | 1.70 | 0.24 | — |
| CB2.5L-C-1 | 2.5 | 80 | 70 | 106 | 3 1/8 | 2 3/4 | 4 3/16 | | D | 0.77 | 1.70 | 0.24 | — |
| CB2.5L-C-2 | 2.5 | 80 | 70 | 106 | 3 1/8 | 2 3/4 | 4 3/16 | | D | 0.77 | 1.70 | 0.24 | — |
| CB2.5L-C-3 | 2.5 | 80 | 70 | 106 | 3 1/8 | 2 3/4 | 4 3/16 | | D | 0.77 | 1.70 | 0.24 | — |
| CB3L-A | 3 | 100 | 57 | 110 | 3 15/16 | 2 1/4 | 4 5/16 | | A | 1.00 | 2.20 | 0.24 | E |
| CB3L-B | 3 | 100 | 57 | 110 | 3 15/16 | 2 1/4 | 4 5/16 | | B | 1.00 | 2.20 | 0.24 | E |
| CB4L-A | 4 | 121 | 71 | 92 | 4 3/4 | 2 13/16 | 3 5/8 | | A | 1.43 | 3.15 | 0.33 | D |
| CB4L-B | 4 | 121 | 71 | 92 | 4 3/4 | 2 13/16 | 3 5/8 | | B | 1.43 | 3.15 | 0.33 | D |
| CB5L-A | 5 | 120 | 60 | 130 | 4 11/16 | 2 3/8 | 5 1/8 | | A | 1.62 | 3.57 | 0.38 | E |
| CB5L-B | 5 | 120 | 60 | 130 | 4 11/16 | 2 3/8 | 5 1/8 | | B | 1.62 | 3.57 | 0.38 | E |
| CB6.5L-B | 6.5 | 139 | 71 | 110 | 5 7/16 | 2 13/16 | 4 5/16 | | B | 2.03 | 4.47 | 0.42 | E |
| CB7-A | 8 | 137 | 76 | 133 | 5 3/8 | 3 | 5 1/4 | | A | 2.19 | 4.82 | 0.57 | E |
| CB7A-A | 8 | 137 | 77 | 149 | 5 3/8 | 3 | 5 7/8 | | A | 2.22 | 4.89 | 0.57 | E |
| CB7B-B | 7 | 150 | 60 | 131 | 5 7/8 | 2 3/8 | 5 1/8 | | B | 1.95 | 4.30 | 0.57 | E |
| CB7BL-B | 7 | 150 | 60 | 131 | 5 7/8 | 2 3/8 | 5 1/8 | | B | 1.95 | 4.30 | 0.57 | E |
| CB7C-A | 8 | 132 | 92 | 116 | 5 3/16 | 3 5/8 | 4 9/16 | | C | 2.10 | 4.63 | 0.57 | A |
| CB7L-A | 8 | 137 | 76 | 133 | 5 3/8 | 3 | 5 1/4 | | A | 2.19 | 4.82 | 0.57 | E |
| CB7L-B | 8 | 137 | 76 | 133 | 5 3/8 | 3 | 5 1/4 | | B | 2.19 | 4.82 | 0.57 | E |
| CB9A-A | 9 | 137 | 77 | 155 | 5 3/8 | 3 | 6 1/6 | | A | 2.60 | 5.73 | 0.57 | E |
| CB9-B | 9 | 137 | 76 | 139 | 5 3/8 | 3 | 5 7/16 | | B | 2.47 | 5.44 | 0.57 | E |
| CB9L-B | 9 | 137 | 76 | 139 | 5 3/8 | 3 | 5 7/16 | | B | 2.47 | 5.44 | 0.57 | E |
| CB9L-A2 | 9 | 137 | 76 | 139 | 5 3/8 | 3 | 5 7/16 | | A | 2.47 | 5.44 | 0.57 | B |
| CB10A-A2 | 11 | 135 | 90 | 155 | 5 5/16 | 3 9/16 | 6 1/16 | | A | 3.40 | 7.49 | 0.75 | G |
| CB10L-A2 | 11 | 135 | 90 | 145 | 5 5/16 | 3 9/16 | 5 11/16 | | A | 3.30 | 7.27 | 0.75 | G |
| CB10L-B | 11 | 135 | 90 | 145 | 5 5/16 | 3 9/16 | 5 11/16 | | B | 3.30 | 7.27 | 0.75 | E |
| CB10L-B2 | 11 | 135 | 90 | 145 | 5 5/16 | 3 9/16 | 5 11/16 | | B | 3.30 | 7.27 | 0.75 | G |
| CB12A-A | 12 | 134 | 80 | 160 | 5 1/4 | 3 1/8 | 6 5/16 | | A | 3.20 | 7.05 | 0.75 | E |
| SCB12A-A ¹¹ | 12 | 134 | 80 | 160 | 5 1/4 | 3 1/8 | 6 5/16 | | A | 3.20 | 7.05 | 0.75 | E |
| CB12A-B | 12 | 134 | 80 | 160 | 5 1/4 | 3 1/8 | 6 5/16 | | B | 3.20 | 7.05 | 0.75 | E |
| CB12AL-A | 12 | 134 | 80 | 160 | 5 1/4 | 3 1/8 | 6 5/16 | | A | 3.20 | 7.05 | 0.75 | E |
| CB12AL-A2 ¹² | 12 | 134 | 80 | 160 | 5 1/4 | 3 1/8 | 6 5/16 | | A | 3.20 | 7.05 | 0.75 | E |
| CB12B-B2 | 12 | 160 | 90 | 131 | 6 5/16 | 3 9/16 | 5 1/8 | | B | 3.25 | 7.16 | 0.75 | G |
| CB12C-A | 12 | 135 | 80 | 174 | 5 5/16 | 3 1/8 | 6 13/16 | | A | 3.09 | 6.81 | 0.75 | D |
| CB14-A2 | 14 | 135 | 91 | 166 | 5 5/16 | 3 9/16 | 6 1/2 | | A | 3.80 | 8.37 | 0.85 | G |
| CB14-B2 | 14 | 135 | 91 | 166 | 5 5/16 | 3 9/16 | 6 1/2 | | B | 3.80 | 8.37 | 0.85 | G |
| CB14A-A1 ¹³ | 14 | 135 | 90 | 177 | 5 5/16 | 3 9/16 | 6 15/16 | | A | 3.85 | 8.48 | 0.85 | E |
| CB14A-A2 ¹³ | 14 | 135 | 90 | 177 | 5 5/16 | 3 9/16 | 6 15/16 | | A | 3.85 | 8.48 | 0.85 | D |

¹¹ S=ELECTROLYTE SENSOR (See Page 28). Some Motorcycles Are Factory-Equipped With A Sensor To Monitor Electrolyte Levels.
¹² With L Shape Adapter (See Page 28).

¹³ Yacht's Innovative Terminal Design Eliminates The Need For Multiple SKU's. CB14A-A2 Features The Twin Terminal Design Enabling Front Or Top Terminal Connections. This Can Be Used To Replace The CB14A-A1.

(Continued)

SPECIFICATIONS • Conventional Battery

12-VOLT ▼

| BATTERY TYPE | CAPACITY AH (10HR) | MAXIMUM DIMENSIONS | | | | | | ASSEMBLY FIGURE | VENT POSITION | WEIGHT WITHOUT ACID | | ACID VOLUME (Liter) | TERMINAL (P.30) |
|-------------------------------|--------------------|---------------------|-----|-----|-------------------|---------|---------|-----------------|---------------|---------------------|-------|---------------------|-----------------|
| | | MILLIMETERS (±2 mm) | | | INCHES (±1/16 in) | | | | | KG | LBS | | |
| | | L | W | H | L | W | H | | | | | | |
| CB14L-A1 | 14 | 135 | 91 | 166 | 5 5/16 | 3 9/16 | 6 1/2 | | A | 3.64 | 8.02 | 0.85 | A |
| CB14L-A2 | 14 | 135 | 91 | 166 | 5 5/16 | 3 9/16 | 6 1/2 | | A | 3.64 | 8.02 | 0.85 | G |
| SCB14L-A2 ¹¹ | 14 | 135 | 91 | 166 | 5 5/16 | 3 9/16 | 6 1/2 | | A | 3.64 | 8.02 | 0.85 | G |
| CB14L-B2 | 14 | 135 | 91 | 166 | 5 5/16 | 3 9/16 | 6 1/2 | | B | 3.64 | 8.02 | 0.85 | G |
| SCB14L-B2 ¹¹ | 14 | 135 | 91 | 166 | 5 5/16 | 3 9/16 | 6 1/2 | | B | 3.64 | 8.02 | 0.85 | G |
| CB16-B | 19 | 175 | 99 | 155 | 6 7/8 | 3 7/8 | 6 1/16 | | B | 5.20 | 11.45 | 1.26 | E |
| CB16-B-LM ¹⁴ | 19 | 173 | 99 | 156 | 6 13/16 | 3 7/8 | 6 1/8 | | B | 5.07 | 11.17 | 1.26 | E |
| CB16HL-A-LM ¹⁴ | 19 | 173 | 99 | 156 | 6 13/16 | 3 7/8 | 6 1/8 | | A | 5.07 | 11.17 | 1.26 | E |
| CB16L-A | 19 | 175 | 99 | 155 | 6 7/8 | 3 7/8 | 6 1/16 | | A | 5.20 | 11.45 | 1.26 | E |
| CB16L-A2 | 19 | 175 | 99 | 155 | 6 7/8 | 3 7/8 | 6 1/16 | | A | 5.20 | 11.45 | 1.26 | D |
| CB16L-B | 19 | 175 | 99 | 155 | 6 7/8 | 3 7/8 | 6 1/16 | | B | 5.20 | 11.45 | 1.26 | E |
| SCB16L-B ¹¹ | 19 | 173 | 99 | 156 | 6 13/16 | 3 7/8 | 6 1/8 | | B | 5.08 | 11.19 | 1.26 | E |
| CB16AL-A2 | 16 | 206 | 70 | 164 | 8 1/16 | 2 3/4 | 6 7/16 | | A | 4.20 | 9.25 | 1.10 | B |
| CB16B-A | 16 | 157 | 89 | 162 | 6 3/16 | 3 1/2 | 6 3/8 | | A | 4.30 | 9.47 | 1.10 | D |
| CB16B-A1 | 16 | 157 | 89 | 162 | 6 3/16 | 3 1/2 | 6 3/8 | | A | 4.30 | 9.47 | 1.10 | A |
| CB16B-A2 | 16 | 158 | 89 | 162 | 6 3/16 | 3 1/2 | 6 3/8 | | A | 4.30 | 9.47 | 1.10 | D |
| CB16C-B | 19 | 173 | 99 | 175 | 6 13/16 | 3 7/8 | 6 7/8 | | B | 5.14 | 11.32 | 1.26 | D |
| CB16CL-B | 19 | 175 | 100 | 175 | 6 7/8 | 3 15/16 | 6 7/8 | | B | 5.20 | 11.45 | 1.26 | D |
| HCB16A-A/AB | 16 | 148 | 90 | 180 | 5 3/4 | 3 9/16 | 7 1/16 | | A | 3.90 | 8.59 | 1.10 | F |
| CB18-A | 18 | 181 | 90 | 160 | 7 1/8 | 3 9/16 | 6 5/16 | | A | 4.60 | 10.13 | 1.10 | F |
| CB18L-A | 18 | 181 | 90 | 160 | 7 1/8 | 3 9/16 | 6 5/16 | | A | 4.60 | 10.13 | 1.10 | F |
| CB18L-A2 | 18 | 181 | 90 | 160 | 7 1/8 | 3 9/16 | 6 5/16 | | A | 4.60 | 10.13 | 1.10 | F |
| C50-N18A-A | 20 | 205 | 90 | 176 | 8 1/16 | 3 9/16 | 6 15/16 | | A | 5.02 | 11.06 | 1.32 | F |
| C50-N18L-A/A2 | 20 | 205 | 90 | 162 | 8 1/16 | 3 9/16 | 6 3/8 | | A | 4.90 | 10.79 | 1.32 | F |
| C50-N18L-A3 | 20 | 205 | 90 | 162 | 8 1/16 | 3 9/16 | 6 3/8 | | A | 4.90 | 10.79 | 1.32 | D |
| C50-N18L-A-LM ¹⁴ | 20 | 205 | 90 | 162 | 8 1/16 | 3 9/16 | 6 3/8 | | A | 5.17 | 11.39 | 1.32 | F |
| SC50-N18L-A ¹¹ | 20 | 205 | 90 | 162 | 8 1/16 | 3 9/16 | 6 3/8 | | A | 4.90 | 10.79 | 1.32 | F |
| SC50-N18L-AT ^{11,15} | 20 | 205 | 90 | 162 | 8 1/16 | 3 9/16 | 6 3/8 | | A | 4.90 | 10.79 | 1.32 | F |
| C60-N24-A | 22.32 | 187 | 128 | 167 | 7 5/16 | 5 | 6 9/16 | | A | 6.10 | 13.44 | 1.74 | C |
| C60-N24L-A | 22.32 | 187 | 128 | 167 | 7 5/16 | 5 | 6 9/16 | | A | 6.10 | 13.44 | 1.74 | C |
| C60-N24L-A2 | 22.32 | 187 | 128 | 167 | 7 5/16 | 5 | 6 9/16 | | A | 6.10 | 13.44 | 1.74 | C |
| C60-N24AL-B | 22.32 | 187 | 128 | 167 | 7 5/16 | 5 | 6 9/16 | | B | 6.10 | 13.44 | 1.74 | C |
| C60-N28L-A (52816) | 26 | 187 | 128 | 167 | 7 5/16 | 5 | 6 9/16 | | A | 6.60 | 14.54 | 1.74 | I |
| C60-N30L-A | 27.9 | 187 | 128 | 169 | 7 5/16 | 5 | 6 5/8 | | A | 7.15 | 15.75 | 1.74 | I |
| C60-N30L-B (53030) | 27.9 | 187 | 128 | 169 | 7 5/16 | 5 | 6 5/8 | | B | 7.15 | 15.75 | 1.74 | I |
| CB30L-B | 30 | 167 | 131 | 176 | 6 1/2 | 5 1/8 | 6 15/16 | | B | 7.50 | 16.52 | 1.74 | D |
| CB30CL-B | 30 | 167 | 131 | 192 | 6 1/2 | 5 1/8 | 7 9/16 | | B | 7.90 | 17.40 | 1.74 | D |
| B68-12 | 28 | 184 | 125 | 170 | 7 1/4 | 4 15/16 | 6 11/16 | | A | 6.70 | 14.76 | 1.74 | C |
| CHD4-12 (H-12) | 28 | 202 | 131 | 163 | 7 15/16 | 5 1/8 | 6 3/8 | | A | 6.70 | 14.76 | 1.90 | H |

¹¹ S=ELECTROLYTE SENSOR (See Page 28). Some Motorcycles Are Factory-Equipped With A Sensor To Monitor Electrolyte Levels.

¹⁴ LM (=YUASA 'CX' BATTERY) Low Maintenance.
¹⁵ AT=WIRE LEAD (See Page 28).

SPECIFICATIONS • Conventional Battery

12-VOLT ▼

| BATTERY TYPE | CAPACITY AH (10HR) | MAXIMUM DIMENSIONS | | | | | | ASSEMBLY FIGURE | VENT POSITION | WEIGHT WITHOUT ACID | | ACID VOLUME (Liter) | TERMINAL (P.30) |
|-------------------|--------------------|---------------------|-----|-----|-------------------|---------|---------|-----------------|---------------|---------------------|-------|---------------------|-----------------|
| | | MILLIMETERS (±2 mm) | | | INCHES (±1/16 in) | | | | | KG | LBS | | |
| | | L | W | H | L | W | H | | | | | | |
| 12N5-3B | 5 | 120 | 60 | 130 | 4 11/16 | 2 3/8 | 5 1/8 | | B | 1.40 | 3.08 | 0.38 | E |
| 12N5-4B | 5 | 120 | 60 | 130 | 4 11/16 | 2 3/8 | 5 1/8 | | B | 1.40 | 3.08 | 0.38 | E |
| 12N5.5-3B | 5.5 | 135 | 60 | 130 | 5 5/16 | 2 3/8 | 5 1/8 | | B | 1.90 | 4.19 | 0.57 | E |
| 12N5.5-4A | 5.5 | 135 | 60 | 130 | 5 5/16 | 2 3/8 | 5 1/8 | | A | 1.90 | 4.19 | 0.57 | B |
| 12N5.5-4A-1 | 5.5 | 135 | 60 | 130 | 5 5/16 | 2 3/8 | 5 1/8 | | A | 1.90 | 4.19 | 0.57 | B |
| 12N5.5-4B | 5.5 | 135 | 60 | 130 | 5 5/16 | 2 3/8 | 5 1/8 | | B | 1.90 | 4.19 | 0.57 | E |
| 12N5.5A-3B | 5.5 | 105 | 91 | 115 | 4 1/8 | 3 9/16 | 4 1/2 | | B | 1.60 | 3.52 | 0.40 | E |
| 12N7-3A | 7 | 137 | 76 | 133 | 5 3/8 | 3 | 5 1/4 | | A | 2.10 | 4.63 | 0.57 | E |
| 12N7-3B | 7 | 137 | 76 | 133 | 5 3/8 | 3 | 5 1/4 | | B | 2.10 | 4.63 | 0.57 | E |
| 12N7-3B-1 | 7 | 137 | 76 | 133 | 5 3/8 | 3 | 5 1/4 | | B | 2.10 | 4.63 | 0.57 | E |
| 12N7-4A | 7 | 137 | 76 | 133 | 5 3/8 | 3 | 5 1/4 | | A | 2.10 | 4.63 | 0.57 | E |
| 12N7-4A-1 | 7 | 137 | 76 | 133 | 5 3/8 | 3 | 5 1/4 | | A | 2.10 | 4.63 | 0.57 | E |
| 12N7-4B | 7 | 137 | 76 | 133 | 5 3/8 | 3 | 5 1/4 | | B | 2.10 | 4.63 | 0.57 | E |
| 12N7B-3A | 7 | 150 | 60 | 131 | 5 7/8 | 2 3/8 | 5 1/8 | | A | 2.08 | 4.58 | 0.57 | E |
| 12N7B-4A | 7 | 150 | 60 | 131 | 5 7/8 | 2 3/8 | 5 1/8 | | A | 2.08 | 4.58 | 0.57 | E |
| 12N7C-3D | 7 | 132 | 92 | 116 | 5 3/16 | 3 5/8 | 4 9/16 | | C | 2.10 | 4.63 | 0.57 | A |
| 12N7CZ-3D | 8 | 132 | 92 | 116 | 5 3/16 | 3 5/8 | 4 9/16 | | C | 2.10 | 4.63 | 0.57 | A |
| 12N7D-3B | 7 | 135 | 76 | 149 | 5 5/16 | 3 | 5 7/8 | | B | 2.12 | 4.67 | 0.57 | E |
| 12N9-3A | 9 | 137 | 76 | 139 | 5 3/8 | 3 | 5 7/16 | | A | 2.30 | 5.07 | 0.57 | E |
| 12N9-3A-1 | 9 | 137 | 76 | 139 | 5 3/8 | 3 | 5 7/16 | | A | 2.30 | 5.07 | 0.57 | E |
| 12N9-3B | 9 | 137 | 76 | 139 | 5 3/8 | 3 | 5 7/16 | | B | 2.30 | 5.07 | 0.57 | E |
| 12N9-4B | 9 | 137 | 76 | 139 | 5 3/8 | 3 | 5 7/16 | | B | 2.30 | 5.07 | 0.57 | E |
| 12N9-4B-1 | 9 | 137 | 76 | 139 | 5 3/8 | 3 | 5 7/16 | | B | 2.30 | 5.07 | 0.57 | E |
| 12N10-3A | 10 | 135 | 90 | 145 | 5 5/16 | 3 9/16 | 5 11/16 | | A | 3.00 | 6.61 | 0.75 | E |
| 12N10-3A-1 | 10 | 135 | 90 | 145 | 5 5/16 | 3 9/16 | 5 11/16 | | A | 3.00 | 6.61 | 0.75 | E |
| 12N10-3A-2 | 10 | 135 | 90 | 145 | 5 5/16 | 3 9/16 | 5 11/16 | | A | 3.00 | 6.61 | 0.75 | G |
| 12N10-3B | 10 | 135 | 90 | 145 | 5 5/16 | 3 9/16 | 5 11/16 | | B | 3.00 | 6.61 | 0.75 | E |
| 12N10-3B-1 | 10 | 135 | 90 | 145 | 5 5/16 | 3 9/16 | 5 11/16 | | B | 3.00 | 6.61 | 0.75 | E |
| 12N11-3A | 11 | 134 | 90 | 155 | 5 1/4 | 3 9/16 | 6 1/16 | | A | 2.90 | 6.39 | 0.75 | E |
| 12N11-3A-1 | 11 | 134 | 90 | 155 | 5 1/4 | 3 9/16 | 6 1/16 | | A | 2.90 | 6.39 | 0.75 | G |
| 12N11-3B | 11 | 134 | 90 | 155 | 5 1/4 | 3 9/16 | 6 1/16 | | B | 2.90 | 6.39 | 0.75 | E |
| 12N12A-4A-1 | 12 | 134 | 80 | 160 | 5 1/4 | 3 1/8 | 6 5/16 | | A | 3.00 | 6.61 | 0.75 | E |
| 12N14-3A | 14 | 135 | 91 | 166 | 5 5/16 | 3 9/16 | 6 1/2 | | A | 3.40 | 7.49 | 0.85 | G |
| 12N14-3B | 14 | 135 | 91 | 166 | 5 5/16 | 3 9/16 | 6 1/2 | | B | 3.40 | 7.49 | 0.85 | G |
| 12N16-3A | 16 | 173 | 99 | 156 | 6 13/16 | 3 7/8 | 6 1/8 | | A | 4.30 | 9.47 | 1.26 | E |
| 12N16-3B | 16 | 173 | 99 | 156 | 6 13/16 | 3 7/8 | 6 1/8 | | B | 4.30 | 9.47 | 1.26 | E |
| 12N16-4B | 16 | 173 | 99 | 156 | 6 13/16 | 3 7/8 | 6 1/8 | | B | 4.30 | 9.47 | 1.26 | E |
| 12C16A-3A (51913) | 17.7 | 185 | 81 | 169 | 7 1/4 | 3 3/16 | 6 5/8 | | A | 5.30 | 11.67 | 1.10 | I |
| 12C16A-3B (51814) | 17.7 | 185 | 81 | 169 | 7 1/4 | 3 3/16 | 6 5/8 | | B | 5.30 | 11.67 | 1.10 | I |
| 12N18-3 | 18 | 205 | 90 | 162 | 8 1/16 | 3 9/16 | 6 3/8 | | — | 4.30 | 9.47 | 1.32 | K |
| 12N18-3A | 18 | 205 | 90 | 162 | 8 1/16 | 3 9/16 | 6 3/8 | | A | 4.30 | 9.47 | 1.32 | F |
| 12N18-3B | 18 | 205 | 90 | 162 | 8 1/16 | 3 9/16 | 6 3/8 | | B | 4.30 | 9.47 | 1.32 | F |
| 12N24-3 | 24 | 185 | 125 | 179 | 7 1/4 | 4 15/16 | 7 | | — | 6.00 | 13.22 | 1.74 | C |
| 12N24-3A | 24 | 184 | 125 | 173 | 7 1/4 | 4 15/16 | 6 13/16 | | A | 6.00 | 13.22 | 1.74 | C |
| 12N24-3B | 24 | 184 | 125 | 173 | 7 1/4 | 4 15/16 | 6 13/16 | | B | 6.00 | 13.22 | 1.74 | C |
| 12N24-4 | 24 | 185 | 125 | 179 | 7 1/4 | 4 15/16 | 7 | | — | 6.00 | 13.22 | 1.74 | C |
| 12N24-4A | 24 | 184 | 125 | 170 | 7 1/4 | 4 15/16 | 6 11/16 | | A | 6.00 | 13.22 | 1.74 | C |

SPECIFICATIONS • Conventional Battery

DIN CONVENTIONAL TYPE (EUROPEAN MADE VEHICLES)


12-VOLT ▼

| BATTERY TYPE | CAPACITY AH (20HR) ¹⁶ | MAXIMUM DIMENSIONS | | | | | | ASSEMBLY FIGURE | VENT POSITION | WEIGHT WITHOUT ACID | | ACID VOLUME (Liter) | TERMINAL (P.30) |
|---------------------------------|----------------------------------|---------------------|-----|-----|-------------------|--------|--------|-----------------|---------------|---------------------|-------|---------------------|-----------------|
| | | MILLIMETERS (±2 mm) | | | INCHES (±1/16 in) | | | | | KG | LBS | | |
| | | L | W | H | L | W | H | | | | | | |
| 51913 (12C16A-3A) | 19 ¹⁶ | 185 | 81 | 169 | 7 1/4 | 3 3/16 | 6 5/8 | | A | 5.30 | 11.67 | 1.10 | I |
| 51814 (12C16A-3B) | 19 ¹⁶ | 185 | 81 | 169 | 7 1/4 | 3 3/16 | 6 5/8 | | B | 5.30 | 11.67 | 1.10 | I |
| 52515 (C60-N25L-A) | 25 ¹⁶ | 187 | 128 | 167 | 7 5/16 | 5 | 6 9/16 | | A | 6.10 | 13.44 | 1.74 | I |
| 52816 (C60-N28L-A) | 28 ¹⁶ | 187 | 128 | 167 | 7 5/16 | 5 | 6 9/16 | | A | 6.60 | 14.54 | 1.74 | I |
| 53030 (C60-N30L-B) | 30 ¹⁶ | 187 | 128 | 169 | 7 5/16 | 5 | 6 5/8 | | B | 7.15 | 15.75 | 1.74 | I |
| 53034 (C60-N30-B) ¹⁷ | 30 ¹⁶ | 187 | 128 | 169 | 7 5/16 | 5 | 6 5/8 | | B | 7.15 | 15.75 | 1.74 | I |

¹⁶ DIN Standard Is Based On 20HR Capacity Rate.

¹⁷ 53034 (C60-N30-B) With Build-In Handle For Easy Installation And Removal.

Post arrangement and vent position

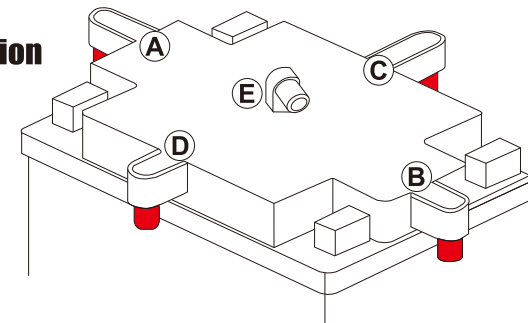

SPECIFICATIONS • Conventional Battery

6-VOLT ▼

| BATTERY TYPE | CAPACITY AH (10HR) | MAXIMUM DIMENSIONS | | | | | | ASSEMBLY FIGURE | VENT POSITION | WEIGHT WITHOUT ACID | | ACID VOLUME (Liter) | TERMINAL (P.30) |
|-----------------------------|--------------------|---------------------|----|-----|-------------------|---------|---------|-----------------|---------------|---------------------|------|---------------------|-----------------|
| | | MILLIMETERS (±2 mm) | | | INCHES (±1/16 in) | | | | | KG | LBS | | |
| | | L | W | H | L | W | H | | | | | | |
| 6N2-2A / UNV ¹⁸ | 2 | 70 | 46 | 97 | 2 3/4 | 1 13/16 | 3 13/16 | | A | 0.40 | 0.88 | 0.15 | — |
| 6N2-2A-1 | 2 | 70 | 46 | 97 | 2 3/4 | 1 13/16 | 3 13/16 | | A | 0.40 | 0.88 | 0.15 | — |
| 6N2-2A-2 | 2 | 70 | 46 | 97 | 2 3/4 | 1 13/16 | 3 13/16 | | A | 0.40 | 0.88 | 0.15 | — |
| 6N2-2A-3 | 2 | 70 | 46 | 97 | 2 3/4 | 1 13/16 | 3 13/16 | | A | 0.40 | 0.88 | 0.15 | — |
| 6N2-2A-4 | 2 | 70 | 46 | 97 | 2 3/4 | 1 13/16 | 3 13/16 | | A | 0.40 | 0.88 | 0.15 | — |
| 6N2-2A-5 | 2 | 70 | 46 | 97 | 2 3/4 | 1 13/16 | 3 13/16 | | A | 0.40 | 0.88 | 0.15 | — |
| 6N2-2A-6 | 2 | 70 | 46 | 97 | 2 3/4 | 1 13/16 | 3 13/16 | | A | 0.40 | 0.88 | 0.15 | — |
| 6N2-2A-7 | 2 | 70 | 46 | 97 | 2 3/4 | 1 13/16 | 3 13/16 | | A | 0.40 | 0.88 | 0.15 | — |
| 6N2-2A-8 | 2 | 70 | 46 | 97 | 2 3/4 | 1 13/16 | 3 13/16 | | A | 0.40 | 0.88 | 0.15 | — |
| 6N2A-2C / UNV ¹⁸ | 2 | 71 | 47 | 105 | 2 13/16 | 1 7/8 | 4 1/8 | | D | 0.40 | 0.88 | 0.15 | — |
| 6N2A-2C-1 | 2 | 71 | 47 | 105 | 2 13/16 | 1 7/8 | 4 1/8 | | D | 0.40 | 0.88 | 0.15 | — |
| 6N2A-2C-2 | 2 | 71 | 47 | 105 | 2 13/16 | 1 7/8 | 4 1/8 | | D | 0.40 | 0.88 | 0.15 | — |
| 6N2A-2C-3 | 2 | 71 | 47 | 105 | 2 13/16 | 1 7/8 | 4 1/8 | | D | 0.40 | 0.88 | 0.15 | — |
| 6N4-2A / UNV ¹⁸ | 4 | 71 | 71 | 94 | 2 13/16 | 2 13/16 | 3 11/16 | | B | 0.60 | 1.32 | 0.24 | — |
| 6N4-2A-1 | 4 | 71 | 71 | 94 | 2 13/16 | 2 13/16 | 3 11/16 | | B | 0.60 | 1.32 | 0.24 | — |
| 6N4-2A-2 | 4 | 71 | 71 | 94 | 2 13/16 | 2 13/16 | 3 11/16 | | B | 0.60 | 1.32 | 0.24 | — |
| 6N4-2A-3 | 4 | 71 | 71 | 94 | 2 13/16 | 2 13/16 | 3 11/16 | | B | 0.60 | 1.32 | 0.24 | — |
| 6N4-2A-4 | 4 | 71 | 71 | 94 | 2 13/16 | 2 13/16 | 3 11/16 | | B | 0.60 | 1.32 | 0.24 | — |
| 6N4-2A-5 | 4 | 71 | 71 | 94 | 2 13/16 | 2 13/16 | 3 11/16 | | B | 0.60 | 1.32 | 0.24 | — |
| 6N4-2A-6 | 4 | 71 | 71 | 94 | 2 13/16 | 2 13/16 | 3 11/16 | | B | 0.60 | 1.32 | 0.24 | — |
| 6N4-2A-7 | 4 | 71 | 71 | 94 | 2 13/16 | 2 13/16 | 3 11/16 | | B | 0.60 | 1.32 | 0.24 | — |
| 6N4-2A-8 | 4 | 71 | 71 | 94 | 2 13/16 | 2 13/16 | 3 11/16 | | B | 0.60 | 1.32 | 0.24 | — |

¹⁸ New UNV Wire Lead Kit Replaces The Need To Stock Multiple Part Numbers In The Same Family.

SPECIFICATIONS • Conventional Battery

6-VOLT ▼

| BATTERY TYPE | CAPACITY AH (10HR) | MAXIMUM DIMENSIONS | | | | | | ASSEMBLY FIGURE | VENT POSITION | WEIGHT WITHOUT ACID | | ACID VOLUME (Liter) | TERMINAL (P.30) |
|-----------------------------|--------------------|---------------------|----|-----|-------------------|---------|---------|-----------------|---------------|---------------------|------|---------------------|-----------------|
| | | MILLIMETERS (±2 mm) | | | INCHES (±1/16 in) | | | | | KG | LBS | | |
| | | L | W | H | L | W | H | | | | | | |
| 6N4B-2A / UNV ¹⁸ | 4 | 101 | 47 | 95 | 3 15/16 | 1 7/8 | 3 3/4 | | A | 0.70 | 1.54 | 0.24 | — |
| 6N4B-2A-1 | 4 | 101 | 47 | 95 | 3 15/16 | 1 7/8 | 3 3/4 | | A | 0.70 | 1.54 | 0.24 | — |
| 6N4B-2A-2 | 4 | 101 | 47 | 95 | 3 15/16 | 1 7/8 | 3 3/4 | | A | 0.70 | 1.54 | 0.24 | — |
| 6N4B-2A-3 | 4 | 101 | 47 | 95 | 3 15/16 | 1 7/8 | 3 3/4 | | A | 0.70 | 1.54 | 0.24 | — |
| 6N4B-2A-4 | 4 | 101 | 47 | 95 | 3 15/16 | 1 7/8 | 3 3/4 | | A | 0.70 | 1.54 | 0.24 | — |
| 6N4B-2A-5 | 4 | 101 | 47 | 95 | 3 15/16 | 1 7/8 | 3 3/4 | | A | 0.70 | 1.54 | 0.24 | — |
| 6N2-2D | 2 | 70 | 46 | 97 | 2 3/4 | 1 13/16 | 3 13/16 | | C | 0.40 | 0.88 | 0.15 | — |
| 6N4A-4D | 4 | 60 | 60 | 130 | 2 3/8 | 2 3/8 | 5 1/8 | | A | 0.70 | 1.54 | 0.24 | — |
| 6N4A-4D-1 | 4 | 60 | 60 | 130 | 2 3/8 | 2 3/8 | 5 1/8 | | A | 0.70 | 1.54 | 0.24 | — |
| 6N4C-1B | 4 | 69 | 70 | 104 | 2 11/16 | 2 3/4 | 4 1/16 | | B | 0.60 | 1.32 | 0.24 | — |
| 6N5.5-3D | 5.5 | 88 | 70 | 98 | 3 7/16 | 2 3/4 | 3 7/8 | | C | 0.80 | 1.76 | 0.24 | — |
| 6N5.5-1D | 5.5 | 88 | 70 | 98 | 3 7/16 | 2 3/4 | 3 7/8 | | C | 0.80 | 1.76 | 0.24 | — |
| 6N5.5-1D-1 | 5.5 | 88 | 70 | 98 | 3 7/16 | 2 3/4 | 3 7/8 | | C | 0.80 | 1.76 | 0.24 | — |
| 6N6-1B | 6 | 99 | 56 | 109 | 3 7/8 | 2 3/16 | 4 1/4 | | E | 0.80 | 1.76 | 0.24 | — |
| 6N6-1B-1 | 6 | 99 | 56 | 109 | 3 7/8 | 2 3/16 | 4 1/4 | | E | 0.80 | 1.76 | 0.24 | — |
| 6N6-3B | 6 | 99 | 58 | 109 | 3 7/8 | 2 1/4 | 4 1/4 | | E | 0.80 | 1.76 | 0.24 | E |
| 6N6-3B-1 | 6 | 99 | 58 | 109 | 3 7/8 | 2 1/4 | 4 1/4 | | B | 0.80 | 1.76 | 0.24 | E |
| 6N6-1D | 6 | 99 | 56 | 109 | 3 7/8 | 2 3/16 | 4 1/4 | | C | 0.80 | 1.76 | 0.24 | — |
| 6N6-1D-2 | 6 | 99 | 56 | 109 | 3 7/8 | 2 3/16 | 4 1/4 | | C | 0.80 | 1.76 | 0.24 | — |
| 6N6-1C | 6 | 98 | 56 | 108 | 3 7/8 | 2 3/16 | 4 1/4 | | D | 0.80 | 1.76 | 0.24 | — |
| B39-6 (6N7-1) | 7 | 125 | 48 | 125 | 4 15/16 | 1 7/8 | 4 15/16 | | — | 0.90 | 1.98 | 0.28 | E |
| B49-6 | 10 | 90 | 83 | 161 | 3 9/16 | 3 1/4 | 6 5/16 | | — | 1.40 | 3.08 | 0.42 | E |
| 6N11-2D | 11 | 148 | 69 | 103 | 5 13/16 | 2 11/16 | 4 1/16 | | C | 1.50 | 3.30 | 0.42 | E |
| 6N11A-1B (6N12AH) | 11 | 120 | 60 | 131 | 4 11/16 | 2 3/8 | 5 1/8 | | B | 1.60 | 3.52 | 0.57 | E |
| 6N11A-3 | 11 | 120 | 60 | 131 | 4 11/16 | 2 3/8 | 5 1/8 | | B | 1.60 | 3.52 | 0.57 | E |
| 6N11A-4 | 11 | 120 | 60 | 131 | 4 11/16 | 2 3/8 | 5 1/8 | | B | 1.60 | 3.52 | 0.57 | E |
| 6N11A-3A | 11 | 120 | 60 | 131 | 4 11/16 | 2 3/8 | 5 1/8 | | A | 1.60 | 3.52 | 0.57 | E |
| 6N11A-4A | 11 | 120 | 60 | 131 | 4 11/16 | 2 3/8 | 5 1/8 | | A | 1.60 | 3.52 | 0.57 | E |
| 6N11-4D | 11 | 148 | 69 | 103 | 5 13/16 | 2 11/16 | 4 1/16 | | C | 1.50 | 3.30 | 0.42 | E |
| 6N12A-2C (B54-6) | 12 | 154 | 55 | 115 | 6 1/16 | 2 3/16 | 4 1/2 | | D | 1.77 | 3.90 | 0.42 | E |
| 6N12A-2D (B54-6A) | 12 | 154 | 55 | 115 | 6 1/16 | 2 3/16 | 4 1/2 | | C | 1.77 | 3.90 | 0.42 | E |
| B38-6A | 13 | 117 | 82 | 160 | 4 5/8 | 3 1/4 | 6 5/16 | | B | 1.80 | 3.96 | 0.57 | K |
| 6CB11-2D | 11 | 148 | 69 | 98 | 5 13/16 | 2 11/16 | 3 7/8 | | C | 1.50 | 3.30 | 0.42 | E |

¹⁸ New UNV Wire Lead Kit Replaces The Need To Stock Multiple Part Numbers In The Same Family.